


# B-SENS-MULTI

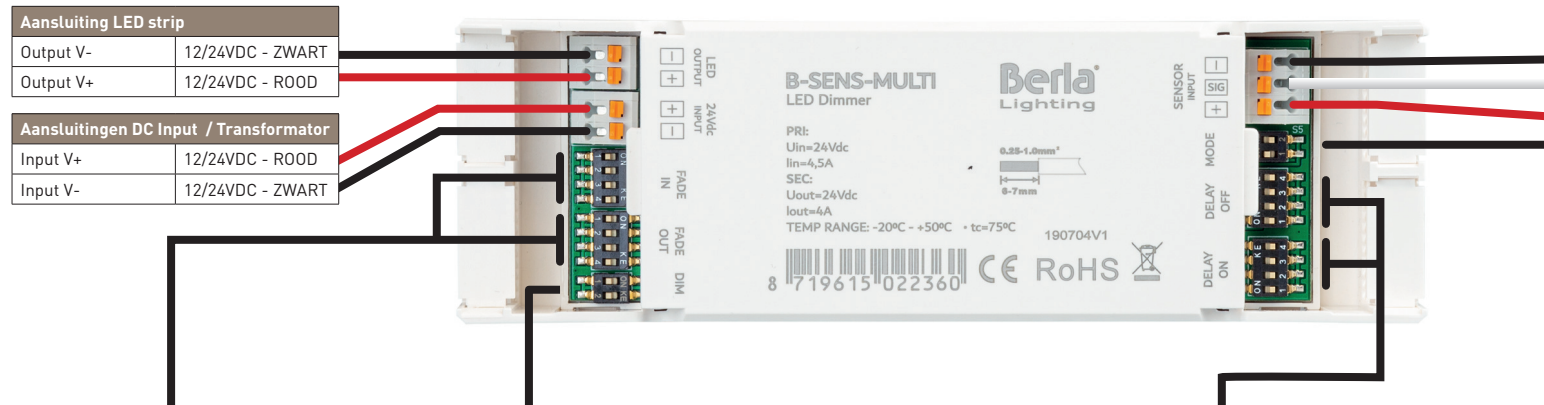

| Aansluiting LED strip |                  |
|-----------------------|------------------|
| Output V-             | 12/24VDC - ZWART |
| Output V+             | 12/24VDC - ROOD  |

| Aansluitingen DC Input / Transformator |                  |
|----------------------------------------|------------------|
| Input V+                               | 12/24VDC - ROOD  |
| Input V-                               | 12/24VDC - ZWART |

| Aansluiting SENSOR |           |       |
|--------------------|-----------|-------|
|                    | MOVE/DOOR | M1/M2 |
| Input V-           | ZWART     | WIT   |
| Signaal            | WIT       | ROOD  |
| Input V+           | ROOD      |       |

| FADETIJD IN/OUT |     |     |     |  | Aantal seconden |
|-----------------|-----|-----|-----|--|-----------------|
| 1               | 2   | 3   | 4   |  |                 |
| off             | off | off | off |  | 0 Sec           |
| on              | off | off | off |  | 1 Sec           |
| off             | on  | off | off |  | 2 Sec           |
| on              | on  | off | off |  | 3 Sec           |
| off             | off | on  | off |  | 4 Sec           |
| on              | off | on  | off |  | 5 Sec           |
| off             | on  | on  | off |  | 6 Sec           |
| on              | on  | on  | off |  | 7 Sec           |
| off             | off | off | on  |  | 8 Sec           |
| on              | off | off | on  |  | 9 Sec           |
| off             | on  | off | on  |  | 10 Sec          |
| on              | on  | off | on  |  | 11 Sec          |
| off             | off | on  | on  |  | 12 Sec          |
| on              | off | on  | on  |  | 13 Sec          |
| off             | on  | on  | on  |  | 14 Sec          |
| on              | on  | on  | on  |  | 15 Sec          |

| Maximale Lichtsterkte |     |          |
|-----------------------|-----|----------|
| 1                     | 2   |          |
| off                   | off | DIM 100% |
| on                    | off | DIM 75%  |
| off                   | on  | DIM 50%  |
| on                    | on  | DIM 25%  |



| Technische Gegevens |                        |
|---------------------|------------------------|
| Voltage             | 24Vdc                  |
| Vermogen            | 96 Watt                |
| Afmetingen (lxbxh)  | 170 mm x 54 mm x 28 mm |

| Vertraging IN/UIT |     |     |     |  | Aantal seconden |
|-------------------|-----|-----|-----|--|-----------------|
| 1                 | 2   | 3   | 4   |  |                 |
| off               | off | off | off |  | 0 Sec           |
| on                | off | off | off |  | 1 Sec           |
| off               | on  | off | off |  | 3 Sec           |
| on                | on  | off | off |  | 5 Sec           |
| off               | off | on  | off |  | 10 Sec          |
| on                | off | on  | off |  | 30 Sec          |
| off               | on  | on  | off |  | 60 Sec          |
| on                | on  | on  | off |  | 180 Sec         |
| off               | off | off | on  |  | 300 Sec         |
| on                | off | off | on  |  | 600 Sec         |
| off               | on  | off | on  |  | 900 Sec         |

(Alle andere = 0 Sec)

## Aansluiten van de B-SENS-MULTI

1. Sluit eerst de LED strip aan op de B-SENS-MULTI volgens bovenstaand schema.
2. Sluit daarna de Transformator aan op de B-SENS-MULTI volgens bovenstaand schema.
3. Sluit de sensor aan op de B-SENS-MULTI volgens bovenstaand schema
4. Sluit nu de transformator aan op de net spanning.

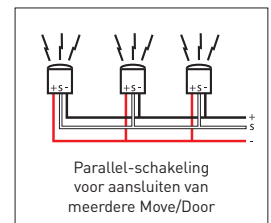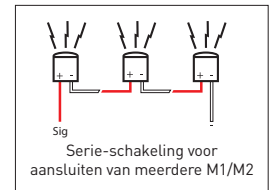

| MODE AAN/UIT |     |                                                                                                                                                                                         |
|--------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1            | 2   |                                                                                                                                                                                         |
| off          | off | M1/M2 deursensor.<br>LED gaat aan bij 1 of meerdere deuren open, uit bij alle deuren dicht.                                                                                             |
| on           | off | Movesensor.<br>Ledstrip gaat aan bij beweging, en schakelt pas uit na 30 seconden geen beweging. De LEAD OUT telt hier nog extra bij op. Meerdere sensoren, dan aansluiten in parallel. |
| on           | off | Doorsensor.<br>Ledstrip gaat aan bij 1 of meerdere deuren open, en uit bij alle deuren dicht. Meerdere sensoren, dan aansluiten in parallel.                                            |