

Installation Instruction for LED High Bay Light – Type DS

A. Product parameters:

Working voltage: see product label rated voltage Working environment: -20 °C ~ 50 °C. For indoor use only.

B. Quality Warranty:


1. Quality guarantee is based on storing, installing, operating and maintaining correctly in the normal operation condition.
2. It is not included in our maintaining range when installing inappropriately, breaking the operating rules, and leading to the products damaging.
3. Our company will maintain the right to either repair, parts replacing, or products exchange during the quality warranty period.

C. Safety Note:


Non professional do not operate the relative work

1. Before using the light, please check the integrity of the package and the product. If the light was damaged during transportation, please do not use it.
2. Please do not hit or press it with heavy substance.
3. Please Handle and transport gently.
4. Before cleaning the light, please make sure the power supply have been turned off.
5. Never use any chemicals or abrasives for cleaning.
6. Please do not touch and twist the lamp when power is on.
7. Light warm is normal when power is on.


D. Hanging ring installation



1. Install the ring to the hole of the back cover




2. Fix the hook and hang the lamp

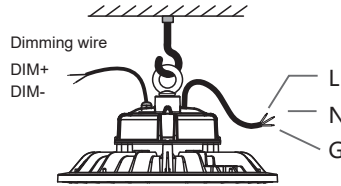


3. Wiring (Dimming Type)

(Note: Please find the corresponding line with reference to the color sticker on the power cord)

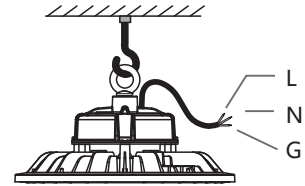


Wiring (Non-dimming Type)


E. Bracket installation



1. Drill holes, fix the expansion screws and then hang the lamp

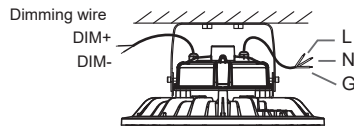


2. Wiring (Dimming Type)




Wiring (Non-dimming Type)

(Note: Please find the corresponding line with reference to the color sticker on the power cord)




3. Adjust Lighting Direction


F. Hanging rod installation



1. Install the rod into the hole on back of the lamp




2. Install the lamp to the ceiling

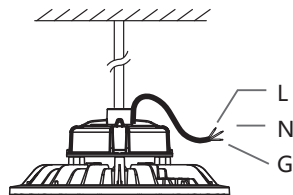

3. Wiring

(Note: Please find the corresponding line with reference to the color sticker on the power cord)

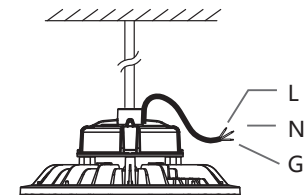

Wiring (Non-dimming Type)

G. Pull Code Switch Color Temperature Ind Adjustment Operationication Instructions.

1. Use the screw-driver to turn the screw counterclockwise.
2. Select the desired color temperature, Tighten the screw clockwise with a screwdriver

CCT
WW: 3000K
NW: 4000K
CW: 6000K



Twist off (counterclockwise)