


LED DOWNLIGHT


Embedded installation



Φ 90mm

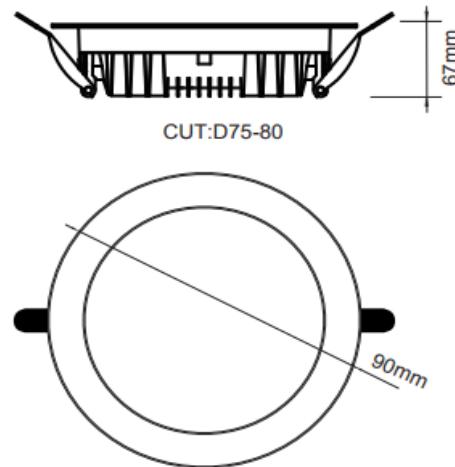

Φ 108mm

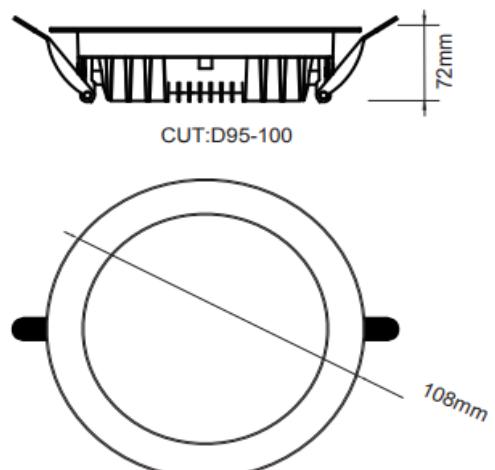


Formulate:		Review:		Approval:		Version:	A1	
Date:		Date:		Date:		Date:		

LED DOWNLIGHT


Embedded installation

Electrical connection

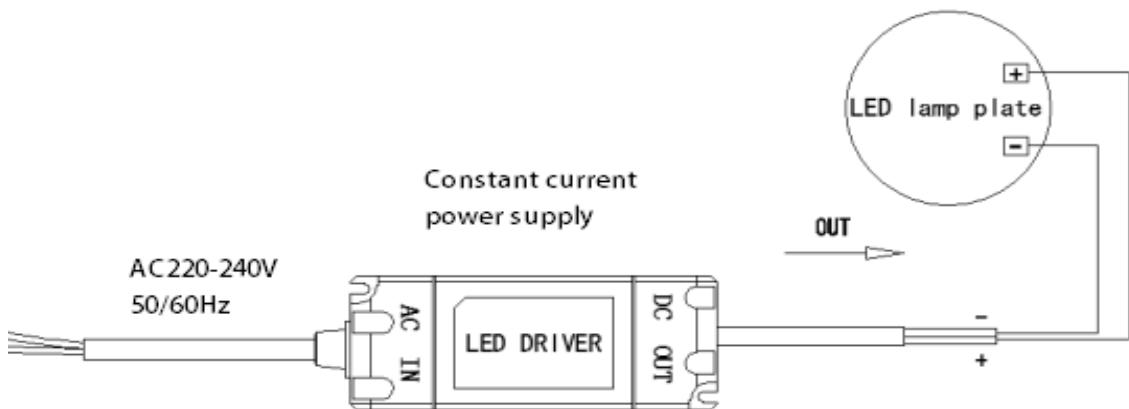


Installation sets


1. Isolate the power.




2. Cut the hole on the ceiling.
cut hole size :Ø75mm/95mm.




3. Properly connected to the electric power box. as shown in picture.



4. Push both side of the circclip, insert into the ceiling hole.

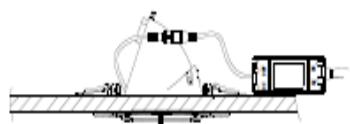

5. Turn on the power to the lighting circuit.



Notes:

- 1: All dimensions are in millimeters.
- 2: Tolerance is ± 1 mm unless otherwise specified.
- 3: Specifications are subject to change without notice.

Warning

Please do not dismantle the lamps, if maintenance please ask professional and authorized officer to operate.

LED DOWNLIGHT

Embedded installation

Main technical parame

Mode	YS-JZ-6W	YS-JZ-12W
	SMD	SMD
Power(W)	6±10%	12±10%
Inputvoltage(V) dimmable	AC220-240 50/60Hz	
LED Current(mA)	350mA	350mA
Led chip	SMD PHILIPS	
CCT	2700K-6500K	
Luminousflux(lm)	2700K	606±5%
	3000K	615±5%
	4000K	690±5%
	5000K	665±5%
	5700K	650±5%
	6500K	642±5%
Efficiency (lm/w)	2700K	101±5%
	3000K	101±5%
	4000K	108±5%
	5000K	107±5%
	5700K	105±5%
	6500K	105±5%
Beam angle	SMD-120°	
Ra	≥80	
Operating ambient temperature	-20～+40°C	
Operating environment humidity	10-80%	
Life span	50000Hours	
Dimensions	Ø90×67mm	Ø108×72mm
Certification	RCM/CE	
IP grade	IP65	

LED DOWNLIGHT

Embedded installation

IPackaging Parameters

Mode	YS-JZ-6W		YS-JZ-12W
	SMD	SMD	SMD
N.W/Carton	6.10KG		10.50KG
G.W/Carton	7.05KG		11.80KG
Carton size	430× 300 × 240mm		490× 410 × 260mm
PCS/Carton	24pcs/Carton		30pcs/Carton
PCS/Cabinet	20GP	910Carton/Cabinet=21840PCS/Cabinet	516Carton/Cabinet=15480PCS/Cabinet
	40GP	1900Carton/Cabinet=45600PCS/Cabinet	1100Carton/Cabinet=33000PCS/Cabinet
	40HQ	2230Carton/Cabinet=53520PCS/Cabinet	1300Carton/Cabinet=39000PCS/Cabinet