
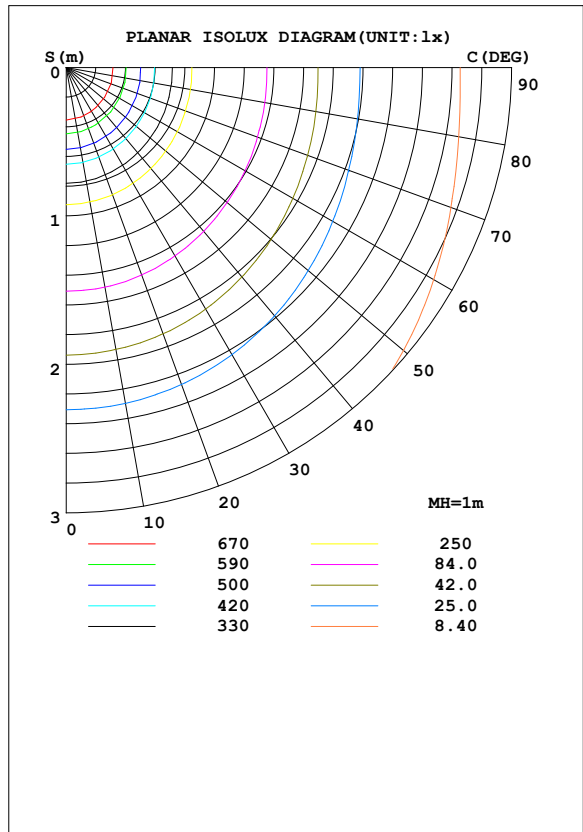


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.13V I:0.0985A P:20.697W PF:0.9529 Freq:49.99Hz Lamp Flux:2819.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 136.22 lm/W			
MODEL		I _{max} (cd)	849.0	S/MH (C0/180)	1.28
NOMINAL POWER (W)	21.13	LOR (%)	100.0	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	2819.4	η UP, DN (C0-180)	3.4, 45.9
NOMINAL FLUX (lm)	2819.4	CIE CLASS	DIRECT	η UP, DN (C180-360)	3.5, 47.1
LAMPS INSIDE	1	η up (%)	7.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	220	η down (%)	93.0	CIBSE SHR MAX	1.35

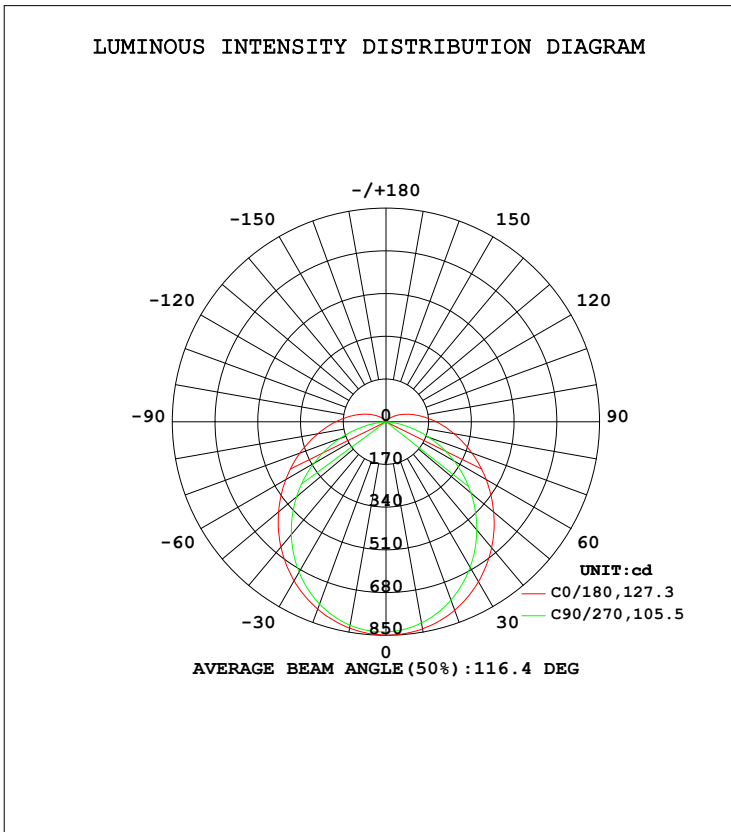

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 15 May 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 9.480m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	836.9	823.5	813.1	812.8	833.8	827.6	822.3	822.0	0- 10	79.30	79.30	2.81,2.81
20	798.3	775.4	755.3	762.3	793.8	782.8	772.5	779.6	10- 20	226.6	305.9	10.9,10.9
30	735.5	700.4	669.1	686.8	731.0	711.1	691.2	709.0	20- 30	342.3	648.3	23,23
40	653.9	606.0	562.0	592.5	650.5	618.4	586.1	616.8	30- 40	412.1	1060	37.6,37.6
50	559.4	499.4	441.8	487.0	558.0	512.7	464.8	510.5	40- 50	430.4	1491	52.9,52.9
60	460.6	389.8	313.6	378.3	460.4	401.5	331.3	399.3	50- 60	400.4	1891	67.1,67.1
70	363.8	285.7	182.4	275.1	365.0	293.6	194.9	290.9	60- 70	332.3	2223	78.9,78.9
80	275.3	194.8	58.34	185.2	275.5	200.1	65.36	197.0	70- 80	243.2	2467	87.5,87.5
90	199.8	122.2	0	114.4	200.1	126.4	0	123.1	80- 90	156.3	2623	93,93
100	136.9	71.26	0	65.55	138.1	73.82	0	70.75	90-100	95.50	2718	96.4,96.4
110	88.49	33.29	0	34.04	89.43	39.30	0	34.63	100-110	54.74	2773	98.4,98.4
120	52.37	11.21	0	15.29	52.84	18.36	0	13.15	110-120	28.67	2802	99.4,99.4
130	27.02	0.6723	0	4.335	27.30	6.063	0	1.991	120-130	12.84	2815	99.8,99.8
140	10.20	0	0	0	10.38	0	0	0	130-140	4.106	2819	100,100
150	0.0117	0	0	0	0.4695	0	0	0	140-150	0.6042	2819	100,100
160	0	0	0	0	0	0	0	0	150-160	0.0008	2819	100,100
170	0	0	0	0	0	0	0	0	160-170	0	2819	100,100
180	0	0	0	0	0	0	0	0	170-180	0	2819	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:15 May 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:9.480m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.13V I:0.0985A P:20.697W PF:0.9529 Freq:49.99Hz		
Lamp Flux:2819.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

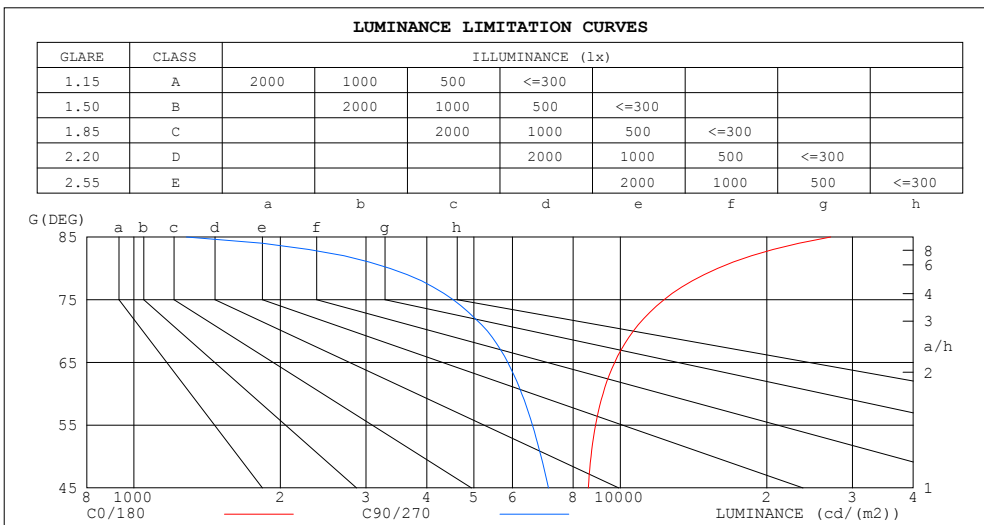


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:15 May 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:9.480m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.13V I:0.0985A P:20.697W PF:0.9529 Freq:49.99Hz		
Lamp Flux:2819.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.96	.96	.96	.93
1.0	.00	.95	.90	.97	.92	.88	.91	.87	.84	.86	.83	.80	.81	.79	.77	.74
2.0	.86	.79	.72	.84	.77	.71	.79	.73	.68	.74	.70	.66	.70	.66	.63	.60
3.0	.75	.66	.59	.73	.65	.58	.69	.62	.57	.65	.59	.55	.62	.57	.53	.50
4.0	.66	.57	.50	.65	.56	.49	.61	.54	.48	.58	.52	.46	.55	.50	.45	.43
5.0	.59	.50	.43	.58	.49	.42	.55	.47	.41	.52	.45	.40	.49	.44	.39	.37
6.0	.53	.44	.37	.52	.43	.37	.49	.42	.36	.47	.40	.35	.45	.39	.34	.32
7.0	.48	.39	.33	.47	.38	.32	.45	.37	.32	.43	.36	.31	.41	.35	.30	.28
8.0	.44	.35	.29	.43	.35	.29	.41	.34	.28	.39	.33	.28	.37	.32	.27	.25
9.0	.40	.32	.26	.39	.31	.26	.38	.30	.25	.36	.30	.25	.35	.29	.24	.23
10.0	.37	.29	.24	.36	.29	.23	.35	.28	.23	.33	.27	.23	.32	.26	.22	.20

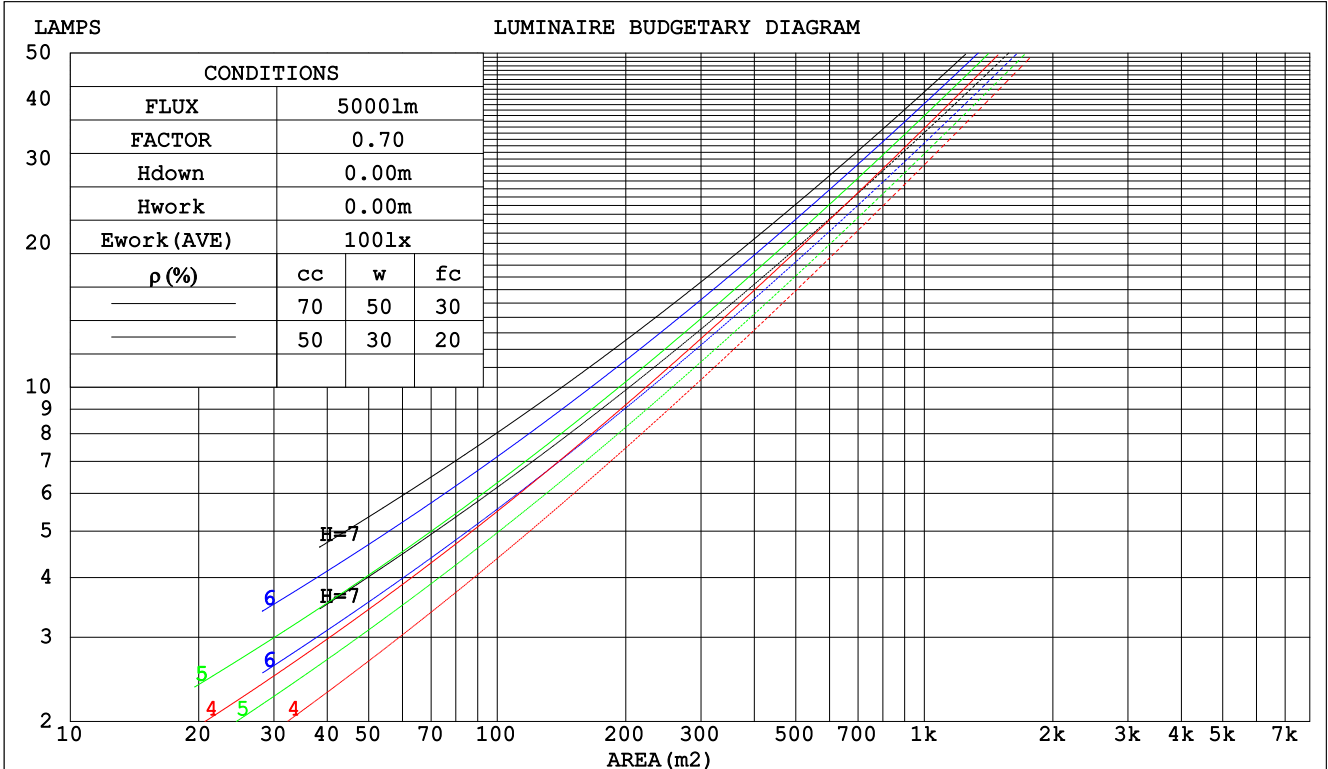

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:15 May 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:9.480m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.13V I:0.0985A P:20.697W PF:0.9529 Freq:49.99Hz		
Lamp Flux:2819.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.357	.203	.064	.348	.198	.063	.330	.189	.060	.314	.181	.058	.299	.173	.056	
2.0	.317	.174	.053	.309	.170	.052	.294	.163	.051	.279	.157	.049	.266	.150	.047	
3.0	.286	.152	.046	.279	.149	.045	.265	.143	.044	.252	.138	.042	.240	.133	.041	
4.0	.260	.135	.040	.253	.133	.039	.241	.128	.038	.229	.123	.037	.218	.119	.036	
5.0	.238	.121	.035	.232	.119	.035	.221	.115	.034	.210	.111	.033	.200	.107	.032	
6.0	.219	.110	.031	.214	.108	.031	.203	.104	.030	.194	.101	.030	.185	.097	.029	
7.0	.203	.100	.028	.198	.099	.028	.189	.095	.027	.180	.092	.027	.172	.089	.026	
8.0	.188	.092	.026	.184	.091	.026	.176	.088	.025	.168	.085	.025	.161	.082	.024	
9.0	.176	.085	.024	.172	.084	.024	.165	.081	.023	.157	.079	.023	.151	.077	.022	
10.0	.165	.079	.022	.161	.078	.022	.155	.076	.021	.148	.073	.021	.142	.071	.020	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.244	.244	.244	.208	.208	.208	.142	.142	.142	.082	.082	.082	.026	.026	.026	
1.0	.237	.209	.184	.203	.180	.159	.139	.124	.110	.080	.071	.064	.026	.023	.021	
2.0	.230	.186	.149	.197	.160	.129	.135	.111	.090	.078	.064	.053	.025	.021	.017	
3.0	.222	.169	.126	.190	.145	.109	.131	.101	.077	.075	.059	.045	.024	.019	.015	
4.0	.214	.156	.111	.184	.134	.097	.126	.094	.068	.073	.055	.040	.023	.018	.013	
5.0	.206	.145	.101	.177	.126	.088	.122	.088	.062	.071	.052	.037	.023	.017	.012	
6.0	.199	.137	.093	.171	.119	.081	.118	.083	.057	.068	.049	.034	.022	.016	.011	
7.0	.192	.131	.088	.165	.113	.076	.114	.079	.054	.066	.047	.032	.021	.015	.011	
8.0	.185	.125	.083	.159	.108	.073	.110	.076	.052	.064	.045	.031	.021	.015	.010	
9.0	.179	.120	.080	.154	.104	.070	.107	.073	.050	.062	.043	.030	.020	.014	.010	
10.0	.173	.116	.077	.149	.100	.068	.104	.071	.048	.060	.042	.029	.020	.014	.010	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:15 May 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:9.480m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.13V I:0.0985A P:20.697W PF:0.9529 Freq:49.99Hz										
Lamp Flux:2819.4x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.: EVERFINE			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.6	18.1	17.0	18.4	18.7	15.0	16.5	15.4	16.8	17.2
3H	18.8	20.2	19.2	20.6	21.0	16.4	17.8	16.8	18.1	18.5
4H	20.0	21.3	20.5	21.7	22.1	16.9	18.2	17.3	18.6	19.0
6H	21.3	22.6	21.8	23.0	23.4	17.2	18.4	17.6	18.8	19.2
8H	22.1	23.3	22.5	23.7	24.1	17.2	18.4	17.7	18.8	19.3
12H	22.9	24.0	23.3	24.5	24.9	17.2	18.4	17.7	18.8	19.3
4H 2H	17.1	18.4	17.5	18.8	19.2	15.9	17.2	16.4	17.6	18.0
3H	19.6	20.8	20.1	21.2	21.6	17.5	18.7	18.0	19.1	19.6
4H	21.0	22.1	21.5	22.5	23.0	18.2	19.2	18.7	19.7	20.2
6H	22.5	23.5	23.0	23.9	24.5	18.7	19.6	19.2	20.1	20.6
8H	23.4	24.3	23.9	24.7	25.3	18.8	19.7	19.3	20.2	20.7
12H	24.3	25.2	24.9	25.7	26.2	18.8	19.6	19.4	20.1	20.7
8H 4H	21.3	22.2	21.8	22.7	23.2	19.0	19.8	19.5	20.3	20.9
6H	23.1	23.8	23.7	24.4	25.0	19.7	20.5	20.3	21.0	21.6
8H	24.2	24.8	24.7	25.4	26.0	20.0	20.7	20.6	21.2	21.8
12H	25.4	26.0	26.0	26.5	27.2	20.2	20.8	20.8	21.4	22.0
12H 4H	21.3	22.1	21.8	22.6	23.2	19.2	20.0	19.7	20.5	21.1
6H	23.2	23.9	23.8	24.4	25.0	20.2	20.8	20.7	21.4	22.0
8H	24.3	24.9	24.9	25.5	26.1	20.6	21.2	21.2	21.7	22.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.4				

CIE Pub.117, 2819 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 3.6)
 Area: 0.1 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:15 May 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:9.480m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.13V I:0.0985A P:20.697W PF:0.9529 Freq:49.99Hz Lamp Flux:2819.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	53	41	34	52	41	34	51	40	34	27
0.80	63	50	43	62	50	42	59	49	42	35
1.00	71	59	51	69	58	50	67	59	50	42
1.25	78	66	58	76	65	58	73	63	57	48
1.50	83	72	64	81	70	63	77	68	62	53
2.00	90	80	72	87	78	71	83	75	69	60
2.50	94	85	78	91	83	76	87	80	74	64
3.00	97	89	83	95	87	81	90	84	78	68
4.00	102	95	89	99	93	87	93	88	84	73
5.00	104	98	93	101	96	91	96	91	87	76
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:15 May 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:9.480m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.13V I:0.0985A P:20.697W PF:0.9529 Freq:49.99Hz Lamp Flux:2819.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

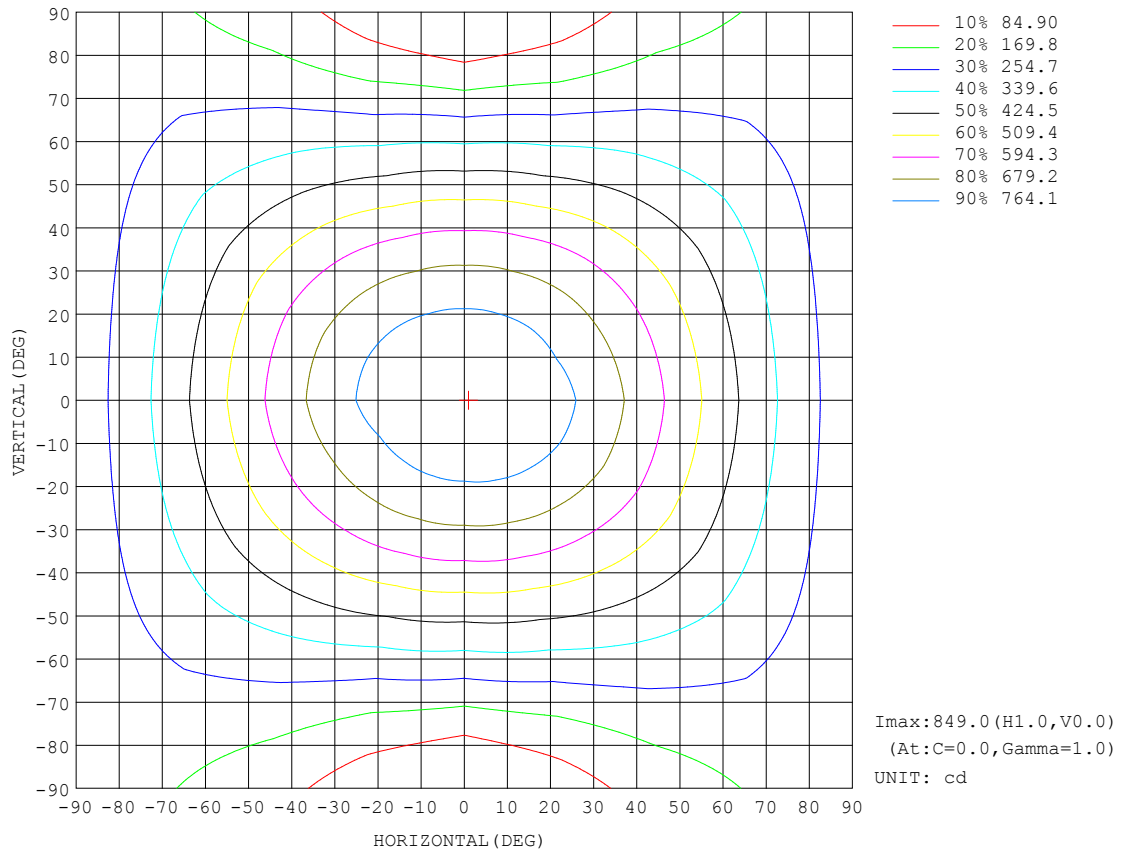


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 15 May 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 9.480m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.13V I:0.0985A P:20.697W PF:0.9529 Freq:49.99Hz Lamp Flux:2819.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

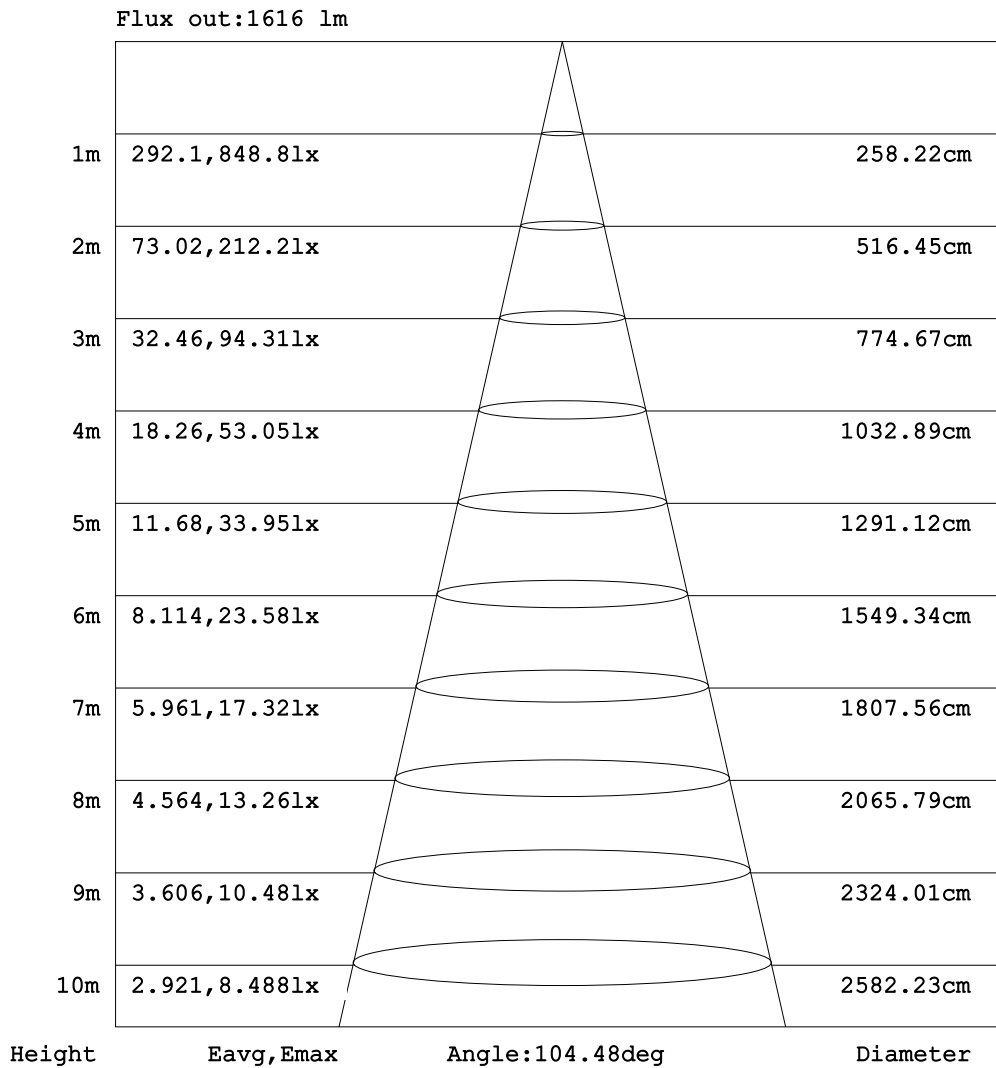


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:15 May 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:9.480m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.13V I:0.0985A P:20.697W PF:0.9529 Freq:49.99Hz Lamp Flux:2819.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

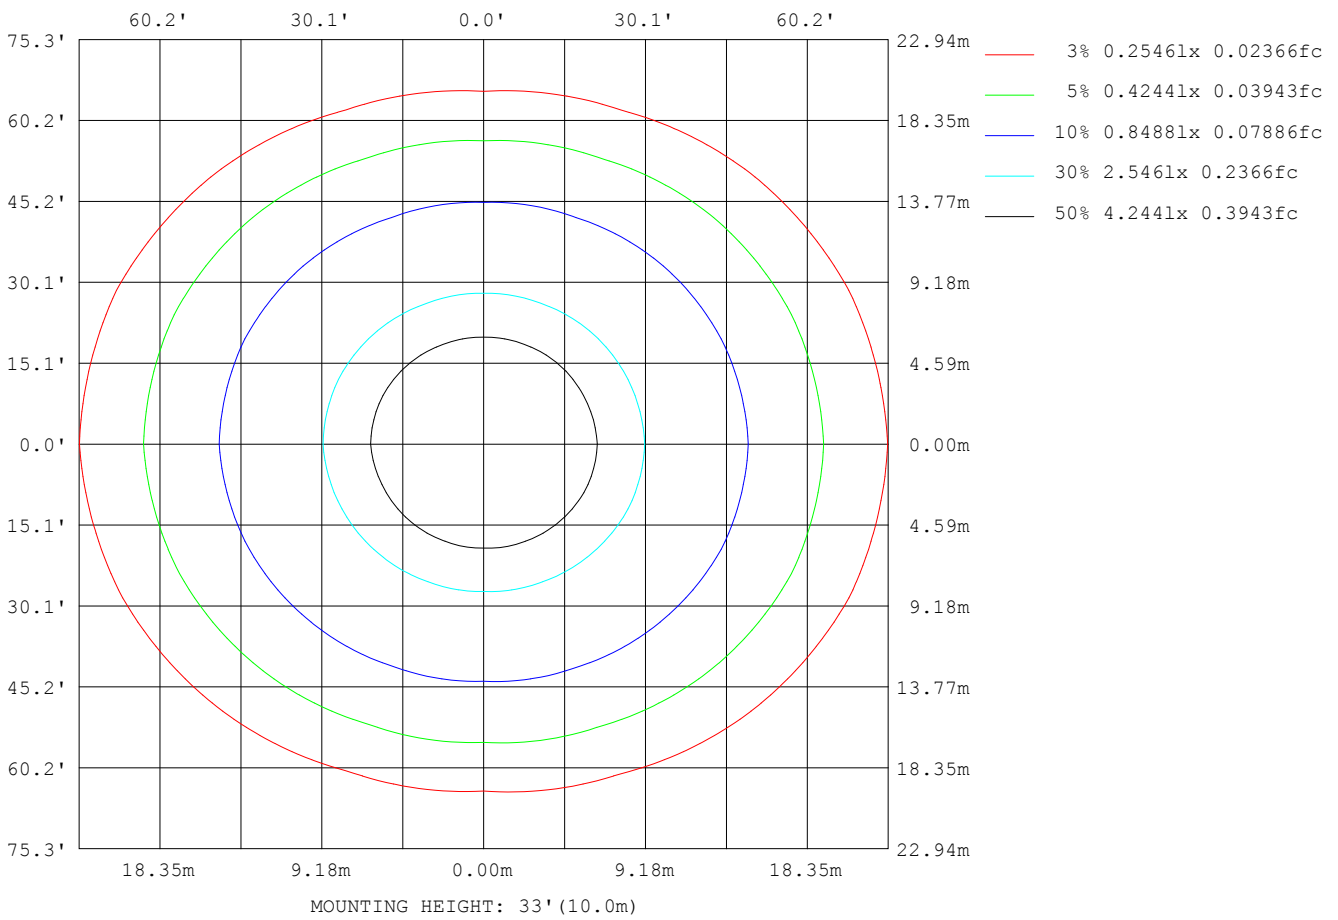

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:15 May 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:9.480m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.13V I:0.0985A P:20.697W PF:0.9529 Freq:49.99Hz Lamp Flux:2819.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	9742
L_0~180 (75) av	12295
L_0~180 (85) av	27070
L_90~270 (65) av	6052
L_90~270 (75) av	4733
L_90~270 (85) av	1461
L_45 (65) av	8001
L_45 (75) av	9205
L_45 (85) av	17757

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:15 May 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:9.480m [K=1.0000]
 Remarks:

Planar Illuminance Curve

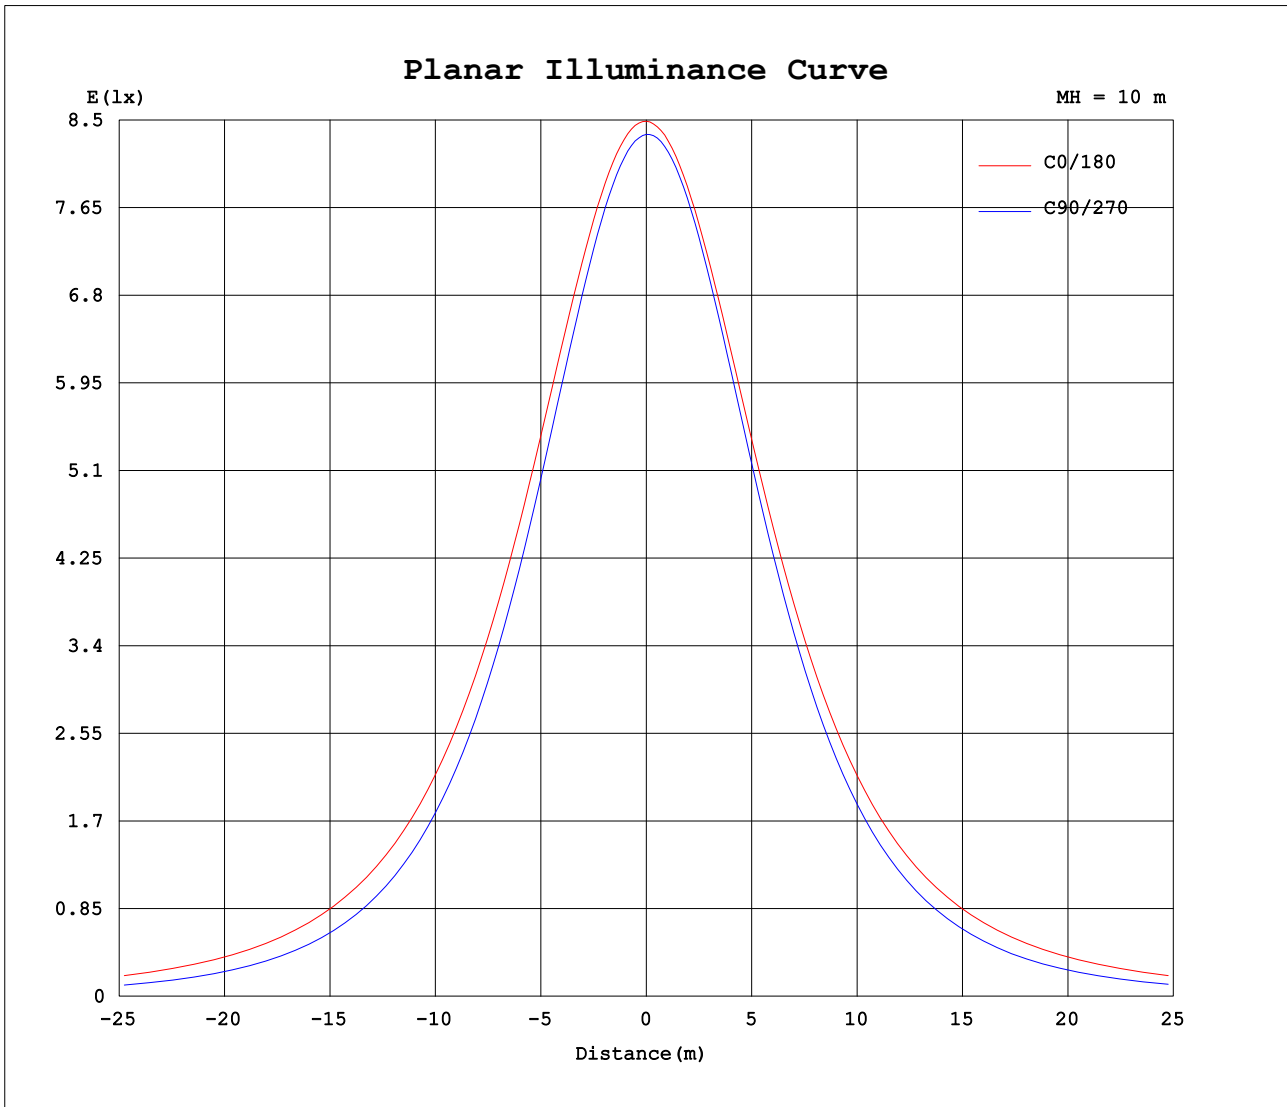

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:15 May 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:9.480m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.13V I:0.0985A P:20.697W PF:0.9529 Freq:49.99Hz Lamp Flux:2819.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	849	845	842	838	836	834	833	832	849	845	842	838	836	834	833	832			
5	846	842	837	833	829	828	827	827	845	842	839	836	834	833	832	830			
10	837	831	824	818	813	812	813	815	834	831	828	824	822	821	822	821			
15	821	814	803	794	788	788	791	796	817	814	809	803	802	802	805	806			
20	798	790	775	763	755	757	762	771	794	790	783	775	772	774	780	783			
25	770	759	741	725	715	718	727	741	765	760	750	739	735	738	748	754			
30	736	723	700	681	669	673	687	705	731	725	711	696	691	696	709	719			
35	697	683	655	631	618	624	642	664	693	685	667	647	641	648	665	680			
40	654	638	606	578	562	570	593	621	651	641	618	594	586	594	617	636			
45	608	590	553	520	503	513	541	574	606	594	566	537	527	537	565	589			
50	559	540	499	461	442	453	487	526	558	545	513	477	465	477	511	540			
55	510	490	444	400	378	393	432	476	509	495	457	415	400	415	455	489			
60	461	439	390	339	314	330	378	427	460	444	401	352	331	352	399	439			
65	411	390	336	277	248	270	325	378	412	395	347	290	263	289	344	389			
70	364	341	286	219	182	211	275	330	365	346	294	229	195	228	291	341			
75	318	294	238	165	117	156	228	285	318	300	245	172	128	169	242	295			
80	275	252	195	116	58.3	108	185	244	276	257	200	121	65.4	118	197	253			
85	236	213	155	76.2	11.2	68.2	146	206	236	218	160	78.8	14.3	75.2	157	214			
90	200	178	122	46.2	0.00	39.4	114	172	200	182	126	47.8	0.00	44.0	123	178			
95	166	147	94.3	25.8	0.00	20.6	87.6	141	167	149	97.6	26.9	0.00	23.2	94.4	146			
100	137	119	71.3	12.4	0.00	9.08	65.5	114	138	121	73.8	13.6	0.00	9.26	70.8	118			
105	111	95.3	50.0	4.47	0.00	2.44	47.9	91.1	112	96.7	54.7	5.59	0.00	2.75	50.7	94.0			
110	88.5	74.5	33.3	0.00	0.00	0.00	34.0	71.1	89.4	75.7	39.3	0.65	0.00	0.00	34.6	73.3			
115	68.9	57.0	21.2	0.00	0.00	0.00	23.4	54.1	69.7	57.8	27.4	0.00	0.00	0.00	22.4	54.9			
120	52.4	41.2	11.2	0.00	0.00	0.00	15.3	40.0	52.8	42.9	18.4	0.00	0.00	0.00	13.2	36.4			
125	38.6	27.8	4.89	0.00	0.00	0.00	8.97	28.5	38.8	30.7	11.3	0.00	0.00	0.00	6.69	28.6			
130	27.0	18.6	0.67	0.00	0.00	0.00	4.34	19.2	27.3	20.8	6.06	0.00	0.00	0.00	1.99	18.6			
135	17.7	7.70	0.00	0.00	0.00	0.00	0.88	11.8	17.9	12.9	2.08	0.00	0.00	0.00	0.00	9.15			
140	10.2	1.84	0.00	0.00	0.00	0.00	0.00	6.04	10.4	6.73	0.00	0.00	0.00	0.00	0.00	2.75			
145	4.36	0.00	0.00	0.00	0.00	0.00	0.00	1.66	4.64	2.16	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:15 May 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:9.480m [K=1.0000]
 Remarks: