




Part Number: **TC1279-223SLXA**
Description: **SLOTTED DUCT AND LID ASSEMBLY,
100 x 50mm DUCT, LOW HEIGHT APPLICATIONS**

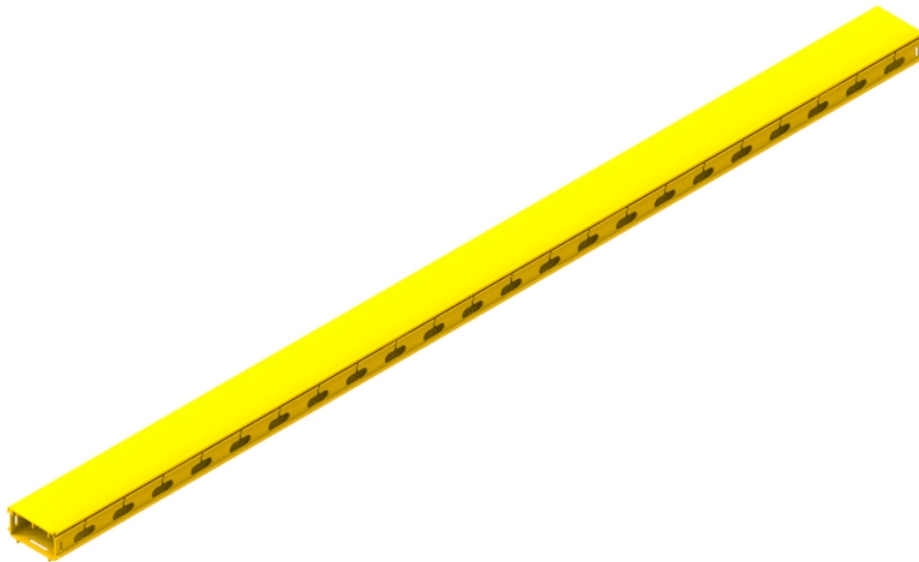

Use / Application:

This 100x50mm duct is similar to standard duct except that it is slotted to allow optical fibre cord feed off at any point, and external viewing of the “ducts” contents. Slots are spaced at 2RU (i.e. 88.9mm) centres. The 100x50mm duct carries up to 560 pigtailed or patch cords (Ø2mm) to a depth of 30mm, without excess stress on them, during removal. The duct comes complete with a full-length extruded lid (Part No: TC1279-24), attached using hinges (Part No: TC1279-43KIT). The duct is made of tough plastic with a non-halogen fire retardant. It connects to other 100x50mm duct sections and various bends, adaptors etc., using the 100x50mm joiner (Part No: TC1279-226); which is available separately.

Benefits & Features:

- Clips straight into joiner
- Includes lid (Part No: TC1279-24) and hinges (Part No: TC1279-43KIT)
- Tough, fire retardant material
- Joiners (Part No: TC1279-226); available separately
- Purchase by the unit

Technical Attributes:

Dimensions	120mm (W) x 60mm (H) x 2,000mm (D)
Weight	2.1kg
Materials	Fire retardant plastic, Halogen free, UL94-V1 rated
Colour	Yellow