



Name of product:

**Cable CobiCabling CAT. 6A U/UTP LSOH
650MHz Dca 500m**



Part number:

C13-1300

FEATURES:


- 650MHz frequency (CAT. 6A)
- Separatorpair
- 25-year warranty
- Length marker every 1m
- LSOH sheath
- Euroclass Dca

PRODUCT DESCRIPTION:

CobiCabling category 6A unshielded cable LSOH is designed to exceed requirements of EN 50173-1:2018-07, EN 50173-1:2018, ISO/IEC 11801:2017, with additional margin in all parameters. Our CAT. 6A cable is used in high-speed networks, including 10 Gigabit Ethernet. In combination with our patch panels and RJ45 modules, it provides a reliable foundation for any network.

COMPLIANCE WITH THE REQUIREMENTS OF STANDARDS:

- EN 50173-1:2018
- EN 50173-1:2018-07
- ISO/IEC 11801:2017
- ANSI/TIA-568-D.0/D.1/D.2
- IEC 60754-2/A1:2020

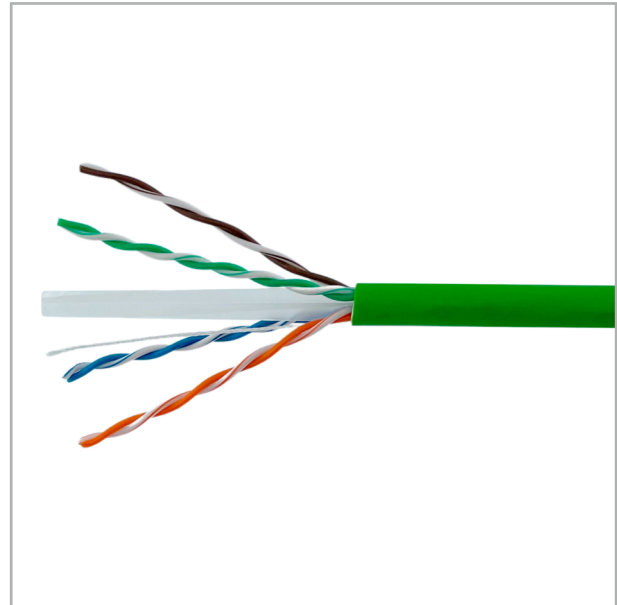

TYPICAL APPLICATIONS:

- 10GBase-T 10 Gigabit Ethernet;
- Composite Video;
- PoE, PoE+, 4PPoE

Feature	Values
Frequency	Tested to 650MHz
Outer sheath	LSOH green colour
Compatible with	6A
Shielding	U/UTP
Length marking	from 500 to 0 (marked every 1m)
NVP	68% (0,68)
Outer diameter	6,6mm (±0,3mm)
Conductor diameter	23AWG
Euroclass	Dca
Temperature range	During installation -10°C do +50°C, During operation -30°C do +70°C